



## A Series Stand-on Reach Truck

with capacities of 2,000 to 2,500kg



HANGCHA GROUP CO., LTD.

**Factory site:** 566 Xiangfu Road,  
Hangzhou, Zhejiang, China (311505)

Tel: +86-571-88925735 88925755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks delivered may differ slightly from those in brochure.

# The World of Hangcha



A green Hangcha forklift with a pallet truck attachment is positioned in front of a large, white, blocky text background. The text reads 'THE POWER OF TEAM' in a bold, sans-serif font. The 'H' and 'T' are on the top row, and 'E', 'P', 'O', 'W', 'R', 'A', 'V', 'E', 'O', 'F', 'T', 'E', 'A', 'M' are on the bottom row. The forklift is angled towards the viewer, showing its front and side. It has a green body with 'HANGCHA' printed on the side and front. The pallet truck attachment has a black frame and a metal fork. The number '25' is visible on the side of the forklift. The background is a solid white color.




**HANGCHA provides Li-Ion battery (LiFePO4) with 6 years or 12000 hours warranty.**



# INNOVATIVE SOLUTIONS NEW POWER NOW

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
  - / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
  - / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 or above.
  - / Adapted to low temperatures: Comes standard with an electrical heating feature , ensuring normal operation in low temperatures.
  - / Quick charging.
  - / Long-working: 4000 charging cycles, capacity retention greater than 75%.
  - / Maintenance-free: Battery does not require manual maintenance.
  - / Green and clean: Pollution-free, zero emissions.

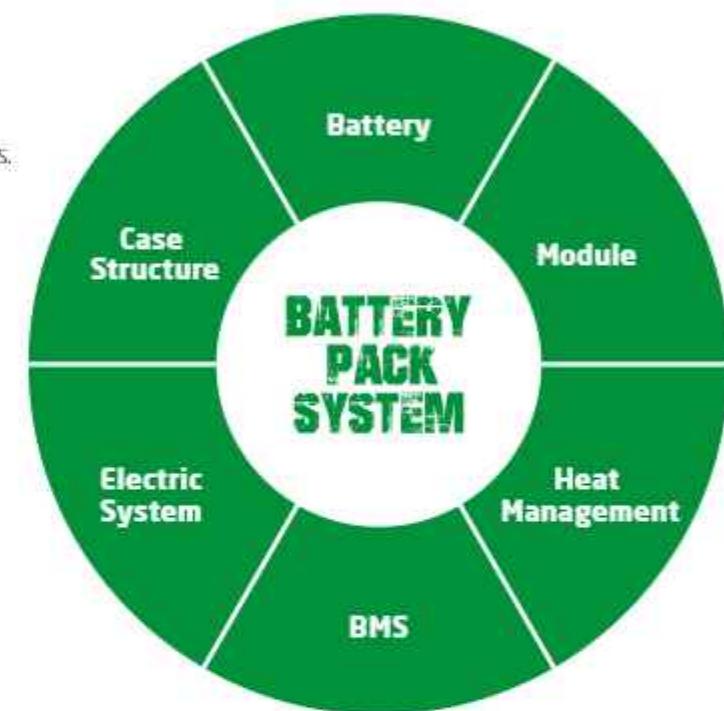

*Rapid charging and opportunity charging ensure continuous availability of vehicles.*

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging. They are maintenance free and do not require a battery change when used for multi-shift operations.

## Li-Ion Battery Specification

Type	EQ020-AC55-1 / EQ020-AC55-IF2	EQ025-AC55-1 / EQ025-AC55-IF2
Battery voltage, capacity	48V/302Wh	48V/30-48V/61Wh

Note:- CE mode

 **Note:** CC trucks  
F2-Means the cold storage truck model F2 are suitable for use in cold storage environments down to -30 °C.

# A Series Stand-on Reach Truck

The new A series 2.0-2.5t standing driving forward-moving type is a new product developed by the company for different market needs.

The ergonomically-designed comfortable vehicle has wide operating vision and a stable control system, and is further optimized and improved in terms of configuration, parameter, performance, safety, cost, etc., making this product comparable to foreign brands and have obvious advantages when compared with other similar domestic products.



## Comfort

- / Optimized ergonomic design shows the steering wheel, joystick and accelerator to the driver at the best distance, making the driving operations easier and more comfortable.
- / The newly-designed molded broad backrest is soft and comfortable, reducing operator fatigue.
- / Shimadzu's low-power multiway valve reduces operating force and improves comfort.
- / A new layout provides a larger operation space. The low pedals enable the operator to get on and off the vehicle more easily.
- / The imported LORD sensor enables high safety and makes operations to be adapted to road conditions.
- / Standard equipment side charging port for the battery, making charging more convenient.



Safe pedal when the pedal is released, running is stopped, and only hydraulic operation is enabled



Charging plug inside operator's compartment, this eliminates the need to disconnect the plug from battery, enhancing ease of operation (Side)

## Energy saving and high efficient

- / With equipment rationally arranged on the premise that the strength meets the requirements, the vehicle has less weight and cost and less energy consumption.
- / The hydraulic system is optimized to improve the lifting performance. The no-load lifting performance is increased by 23%, and the full-load lifting performance is increased by 22%.
- / The drive system uses a high speed ratio gearbox to make the motor require higher speed and less torque.
- / The combined LED lights (headlights + turn signal lights) have high brightness and low energy consumption.

## Stability

- / Suspension control system effectively reduces the shake when turning/lifting and moving forward and backward.
- / The pump motor assembling on the rear side of the body makes the center of gravity moving backwards and improving stability.
- / Automatic speed control: Travel speed is controlled according to the lift height, providing stability and safety.



New designed mast and the large open steel side provide super visibility and safety

## Maintenance

- / AC drive and lifting systems with maintenance-free motors are used.
- / AC steering with a maintenance-free motor is provided.
- / The fully open door enables easy repair and maintenance.
- / The controller and multiway valve are provided on the front side of the vehicle body. Only the front sealing plate needs to be opened for maintenance.



Forks can tilt forward/backward for easy loading

## Safety

- / An optimal four-link suspension mechanism forces the drive wheel and the auxiliary wheels, thereby reducing slipping of the drive wheel.
- / A disc mechanical brake and regenerative braking system make the truck safer and more reliable.
- / Turn speed is controlled to the turning radius, providing stable turning matched to the state of operation.
- / If the operator is not in the normal operating position, travel power is interrupted and load-handling (except lowering) operations are stopped.
- / The right leg of the OHG moves backwards to protect the driver's back in case of a collision.
- / The brake interlock switch, when the brake is released, triggers the interlock switch, which prohibits movement and can only be operated hydraulically.



## Reliability

- / Equipped with Curtis controllers and CAN communication, ensuring safety and reliability.
- / Utilizing Shimadzu multi valves and gear pumps, the hydraulic efficiency is higher and the lifting speed is faster.
- / Standard equipment includes a battery position switch to ensure that the battery is properly installed, enhancing the safety of the entire truck.
- / Equipped with a proven mechanical disc brake system, it allows for emergency stopping as well as parking brake application, offering high reliability.

## Standard Specification

- / Headlights (LED) + turn signal lights (LED) + alarm lights (LED)
- / Shimadzu's standard triple valve
- / AC driving + AC lifting
- / Electric steering system
- / Soft landing (duplex mast)
- / Suspension control system
- / Automatic turning deceleration
- / Side charge
- / Mechanical brake
- / Regenerative braking (reversing, neutral, braking)
- / Interlock switch
- / In-place switch
- / USB charging port
- / Hydraulic braking (loading wheels)
- / Lift damping system
- / Emergency power-off switch

## Options

- / Blue lights, straight projection lights
- / Optional quadruple and quintuple (Shimadzu)
- / Skid control system
- / Fork camera
- / Altimeter
- / Code lock
- / Retroreflector
- / Fire extinguisher(Excluding models F/F2)
- / Height selection
- / Descending locking valve
- / Side shift
- / Cigarette lighter
- / Cold storage

CQD20-AC5S/CQD25-AC5S/CQD20-AC5S-F2/CQD25-AC5S-F2					
	Tianneng	Zibo	Xunqi	Hawker	FAAM
325 Ah	●	○	○	○	○
375 Ah	○	○		○	○
450 Ah	○				

● Std. ○ Opt.



# COMFORTABLE DESIGN

It's convenient for getting on/off.

Floor height: 285mm.



## Optimal lifting system

- / New optimal manufacturing process ensures the roller gap of the mast, making the mast sways smaller and the vehicle safer.
- / Add 2 safety functions: the mast moves backward to enable hydraulic buffer protection and reduce the speed in this position. It helps reduce the mast swaying when in a high position and makes the vehicle safer.
- / The optimized mast piping with an upper and lower layout mast improves vision of the mast (Triplex mast).
- / The forklift's sleeve structure boasts a simple structure, small mast thickness and light weight.

## BATTERY REACH OUT SYSTEM

The battery can be reached out easily. It enables smooth battery maintenance, inspection and replacement.



- Battery removal**
- 1 Step on the unlocking pedal
  - 2 Press the safety switch
  - 3 Mast moves operating lever forward

### BATTERY REPLACEMENT OPERATION PROCESS

- Battery insertion**
- 1 Press the safety switch
  - 2 Mast moves operating lever backward

